
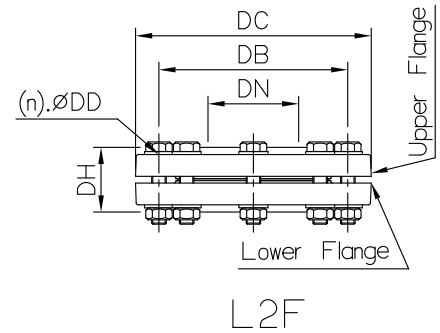
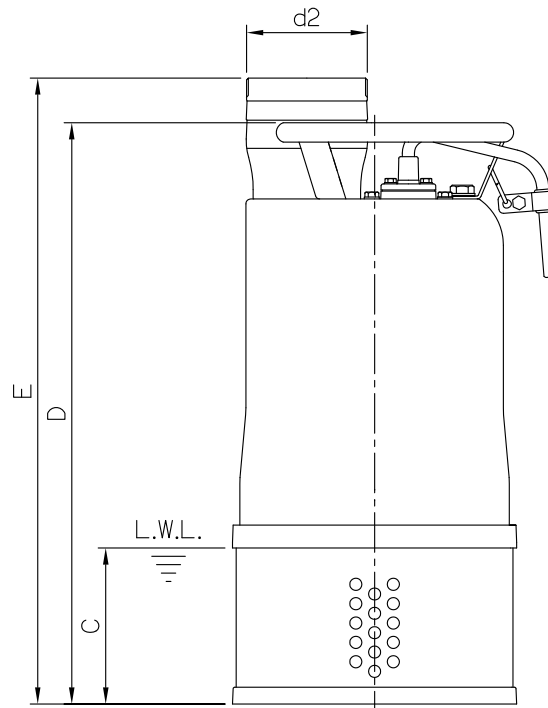


DIMENSIONS

No: S4IC0222010-00

MODEL: IC-32B & IC-33B & IC-43B

10

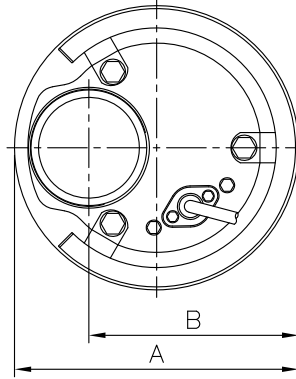

| Pump | | | |
|--------|-----|-------------|-----------|
| Model | d2 | Male Thread | |
| | mm | inch | |
| IC-32B | 80 | 3" | PF/NPT |
| IC-33B | 80 | 3" | PF/NPT |
| IC-43B | 80 | 3" | PF/NPT |
| | 90 | 3.5" | PF |
| | 100 | 4" | PF/PT/NPT |

Dimensions-mm

| Model | A | B | C | D | E | WT1 50Hz/60Hz | Double Flange Set | | |
|--------|-----|-----|-----|-----|-----|------------------|-------------------|-------------------|--------------|
| | | | | | | | L2F3-145-160 | L2F3-145-160 | L2F4-165-190 |
| IC-32B | 235 | 174 | 115 | 511 | 548 | 40 | L2F3-145-160 | - | - |
| IC-33B | 235 | 174 | 115 | 541 | 578 | 45/44 | L2F3-145-160 | - | - |
| IC-43B | 235 | 174 | 130 | 556 | 593 | 45/44 | L2F3-145-160 | L2F4(3.5)-175-180 | L2F4-165-190 |

Weight:kg

Dimensions-mm

| L2F | DN | DB | DC | DD | DH | WT2(n)QTY | |
|-------------------|-----|---------|-----|----|----|-----------|--------|
| | | | | | | WT2 | (n)QTY |
| L2F3-145-160 | 80 | 145~160 | 195 | 19 | 55 | 7 | 8 |
| L2F4(3.5)-175-180 | 100 | 175~180 | 215 | 15 | 56 | 8 | 8 |
| L2F4-165-190 | 100 | 165~190 | 225 | 19 | 58 | 9 | 8 |

Weight:kg

Dimensions-inch

| Model | A | B | C | D | E | WT1 50Hz/60Hz | Double Flange Set | | |
|--------|-------|-------|-------|---------|---------|------------------|-------------------|-------------------|--------------|
| | | | | | | | L2F3-145-160 | L2F3-145-160 | L2F4-165-190 |
| IC-32B | 9 3/4 | 6 7/8 | 4 1/2 | 20 7/8 | 21 1/16 | 88 | L2F3-145-160 | - | - |
| IC-33B | 9 3/4 | 6 7/8 | 4 1/2 | 21 1/16 | 22 3/4 | 99/97 | L2F3-145-160 | - | - |
| IC-43B | 9 3/4 | 6 7/8 | 5 1/8 | 21 7/8 | 23 3/8 | 99/97 | L2F3-145-160 | L2F4(3.5)-175-180 | L2F4-165-190 |

Weight:lb

Dimensions-inch

| L2F | DN | DB | DC | DD | DH | WT2(n)QTY | |
|-------------------|----|---------------|--------|------|--------|-----------|--------|
| | | | | | | WT2 | (n)QTY |
| L2F3-145-160 | 3 | 5 1/16~6 5/16 | 7 1/16 | 3/4 | 2 3/16 | 15 | 8 |
| L2F4(3.5)-175-180 | 4 | 6 7/8~7 1/16 | 8 7/16 | 9/16 | 2 3/16 | 18 | 8 |
| L2F4-165-190 | 4 | 6 1/2~7 1/2 | 8 7/8 | 3/4 | 2 3/16 | 20 | 8 |

Weight:lb

L.W.L.:Lowest Running Water Level

WT1:Pump Weight(Without Cable)
WT2:Double Flange Set Weight